



# MAXXESS



**The Maxxess eMAX-MR16in** is a multi-device interface panel providing the ability to monitor high concentrations of inputs together with a low requirement for output control.

The eMAX-MR16in is capable of supporting 16 general purpose input circuits which can be individually set for normally-open or normally-closed operations and can be declared supervised and non-supervised. Individually configurable parameters can be set for sensitivity ranges, timing parameters and end-of-line resistance values.

Two programmable relay outputs can be configured for fail safe or fail secure operation, supporting "On", "Off", "Pulse", and "Repeating Pulse" commands. With these powerful control-point capacities onboard, the eMAX-MR16in is capable of controlling outboard devices. It can also be activated by the condition of selected system devices locally or regionally without host intervention.

### **Application Notes**

The eMAX-MR16in is an integral component to support Maxxess's flexible, building-block approach to access control system design. The eMAX-MR16in provides the capacity to link, control and respond to an array of sensors. With its RS-485 connectivity, it can be clustered or distributed to best suit the installation environment.

# Input Controller eMAX-MR16in

### **Features**

- *16 programmable inputs; 2 programmable relay outputs*
- *2-wire RS-485 communication*
- *AES 128 bit data encryption*
- *Universal I/O device characterization*
- *Configurable input parameters*
- *Compatible across Mercury's intelligent controller families*

### **Benefits**

- *Built-in capacity to control, respond to external device commands*
- *Easily integrates lighting, heating/cooling, door or elevator control sensors*
- *Initiate commands by operator, by time schedules, or by events*

**Proven Platforms  
for the Future**  
Reliable. Proven. Innovative  
Access Control.

## System Controller eMAX-MR16in

### Technical Specifications

**Primary Power:** 12-24 Vdc +/- 10%,  
350mA maximum  
12Vdc @ 300mA nominal  
24Vdc @ 220mA nominal

**Communication:** RS-485, 2-wire, 4,000'  
(twisted pair with shield,  
Belden 9841)

**Inputs:** 16 General purpose:  
programmable circuit type  
2 Dedicated: Tamper and Power  
Monitor




**Outputs:** 2 Relays: Form-C, 5 Amp 28 VDC

**Dimensions:** 6.0' W x 8.0' L x 1.0' H,  
(152mm W x 203mm L x 25mm H)

**Temperature:** 0-70°C operational,  
-55-85°C storage

**Humidity:** 0-95% RHNC

**Standards:** UL294 Recognized, CE Compliant,  
ROHS,

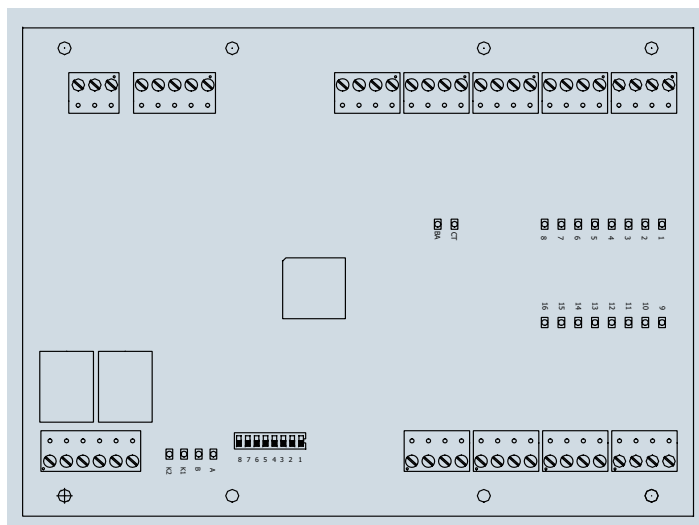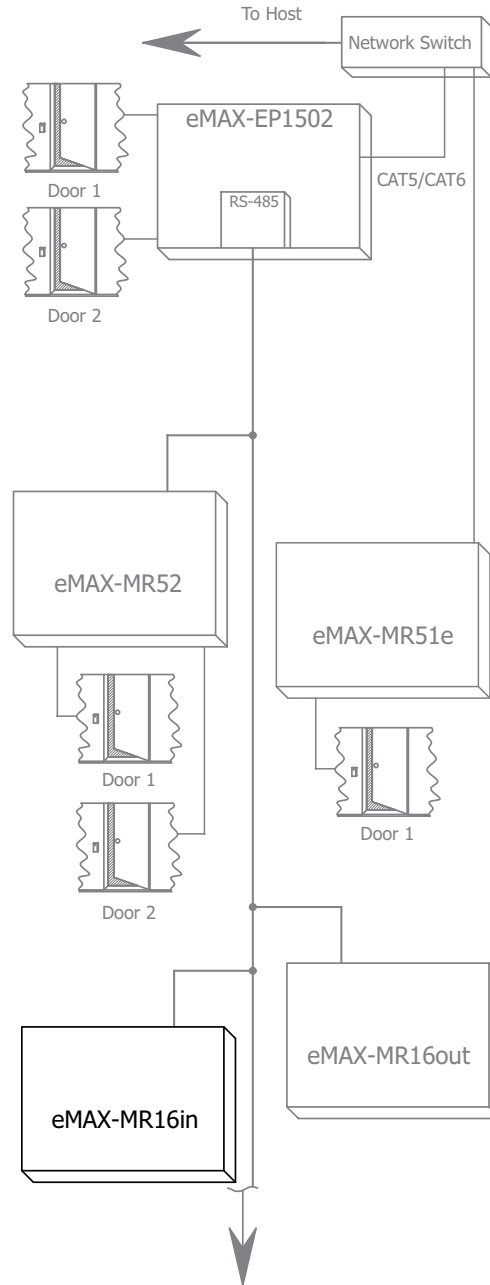

# MAXxESS

MAXxess Systems, Inc.

### Headquarters

1040 North Tustin Avenue  
Anaheim, CA USA  
92807

Tel 714 772 1000

800 842 0221

Fax 714 399 9358

Email sales@maxxess-systems.com

### Service & Technical Support

Tel 714 772 1000

800 842 0221

Fax 714 399 9358

Email support@maxxess-systems.com

### MAXxess Systems Europe, Ltd. Europe, Middle East, Africa

Doncastle House,  
Doncastle Road,  
Bracknell, Berkshire, UK  
RG12 8PE

Tel +44 (0) 870 234 7654

Fax +44 (0) 870 234 7655

Email sales@maxxess-systems.com

### Service & Technical Support

Tel +44 (0) 870 234 7654

Fax +44 (0) 870 234 7655

Email support@maxxess-systems.com

[www.maxxess-systems.com](http://www.maxxess-systems.com)

Information furnished by MAXxess is believed to be accurate and reliable. However, no responsibility is assumed by MAXxess for its use nor for any infringements of patents or other rights of third parties that may result from its use. No license is granted by implication or otherwise under any patent rights of MAXxess Systems, Inc. Specifications subject to change without notice.

© 2009 MAXxess Systems, Inc., Anaheim, CA  
eMAX -MR16in Rev. 10/09 Printed in USA