




MAXESS

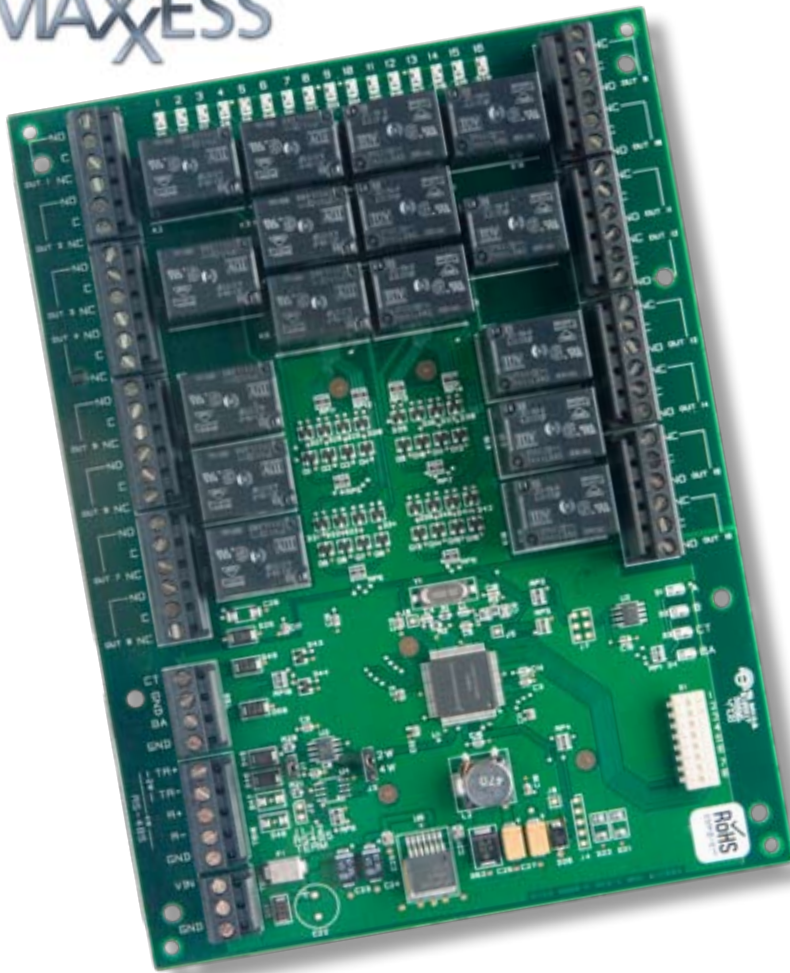

The eMAX-MR16out is a multi-device interface panel that provides the ability to control high concentrations of outputs. It provides 16 general purpose outputs as Form C relay contacts.

The eMAX-MR16out provides individually configurable parameters to be set for timing and for fail-safe vs. fail secure modes. The eMAX-MR16out can be configured to control outboard devices and can be activated by the condition of selected system devices locally or regionally without host intervention.

The eMAX-MR16out can be configured to control a variety of outboard devices for general facility control such as lighting, heating/cooling, door and elevator control. Devices can be activated by the condition of selected system devices locally or regionally without host intervention. Relay operation may be initiated by direct operator commands, by time schedules, or by event-based procedures.

The relays support "On", "Off", "Pulse", and "Repeating Pulse" commands. A pulse may range from .1 second to over 18 hours.

Application Notes

The eMAX-MR16out is an essential component to support Maxxess's flexible, building block approach to access control system design. Providing flexibility and versatility, the eMAX-MR16out is unmatched in widening the range of devices and building controls that can be included in the system design. Building controls such as lighting or HVAC can be activated locally or regionally without host intervention.

Output Controller eMAX-MR16out

Features

- *AES 128 Data Encryption*
- *Universal I/O device characterization*
- *Power supervision and tamper monitoring*
- *Universal system compatibilities across intelligent controller families*

Benefits

- *Built-in capacity to control, respond to external device commands*
- *Easily integrates lighting, heating/cooling, door or elevator control sensors*
- *Initiate commands by operator, by time schedules, or by events*

**Proven Platforms
for the Future**
Reliable. Proven. Innovative
Access Control.

System Controller eMAX-MR16out

Technical Specifications

Primary Power: 12-24 Vdc +/- 10%,
1100mA maximum
12Vdc @ 300mA nominal
24Vdc @ 220mA nominal

Communication: RS-485, 2-wire, 4,000'
(twisted pair with shield,
Belden 9841)

Inputs: 2 Dedicated: Tamper and Power
Monitor




Outputs: 16 Relays: Form-C, 5 Amp 28 VDC

Dimensions: 6.0' W x 8.0' L x 1.0' H,
(152mm W x 203mm L x 25mm H)

Temperature: 0-70°C operational,
-55-85°C storage

Humidity: 0-95% RHNC

Standards: UL294 Recognized, CE Compliant,
ROHS,

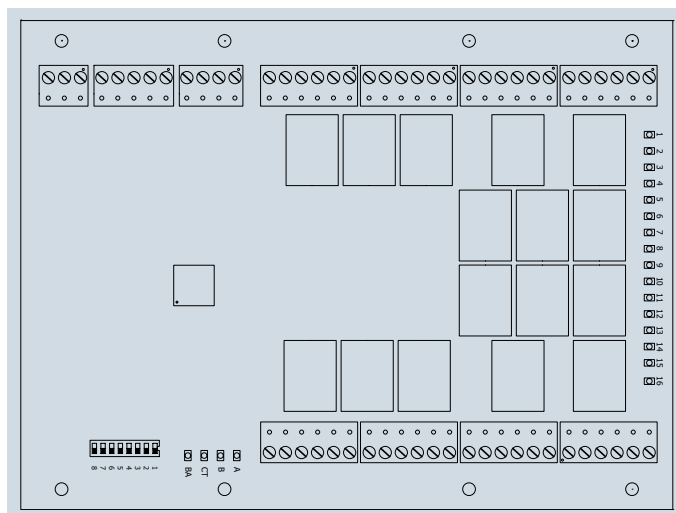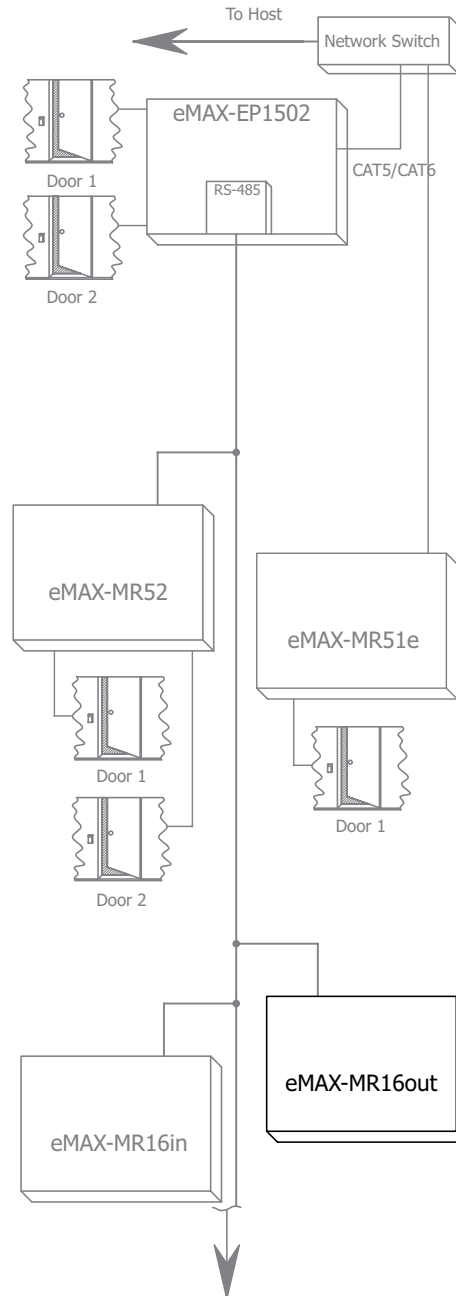

MAXxESS

MAXxess Systems, Inc.

Headquarters

1040 North Tustin Avenue
Anaheim, CA USA
92807

Tel 714 772 1000

800 842 0221

Fax 714 399 9358

Email sales@maxxess-systems.com

Service & Technical Support

Tel 714 772 1000

800 842 0221

Fax 714 399 9358

Email support@maxxess-systems.com

MAXxess Systems Europe, Ltd.

Europe, Middle East, Africa

Doncastle House,
Doncastle Road,
Bracknell, Berkshire, UK
RG12 8PE

Tel +44 (0) 870 234 7654

Fax +44 (0) 870 234 7655

Email sales@maxxess-systems.com

Service & Technical Support

Tel +44 (0) 870 234 7654

Fax +44 (0) 870 234 7655

Email support@maxxess-systems.com

www.maxxess-systems.com

Information furnished by MAXxess is believed to be accurate and reliable. However, no responsibility is assumed by MAXxess for its use nor for any infringements of patents or other rights of third parties that may result from its use. No license is granted by implication or otherwise under any patent rights of MAXxess Systems, Inc. Specifications subject to change without notice.

© 2009 MAXxess Systems, Inc., Anaheim, CA
eMAX -MR16out Rev. 10/09 Printed in USA